




## ROUGH TERRAIN SCISSOR LIFT

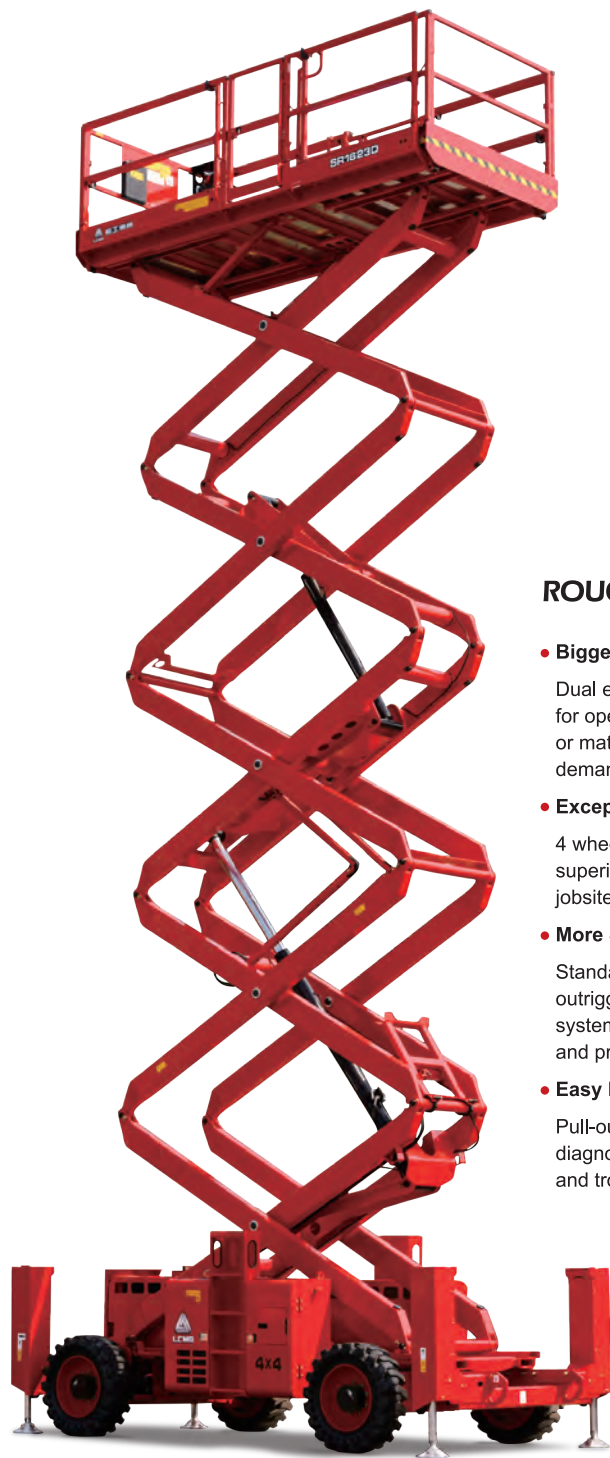

## ROUGH TERRAIN SCISSOR LIFT

- **Bigger Platform and Higher Capacity**

Dual extension decks provide a bigger space for operators and a higher capacity for people or materials that will increase productivity on demanding jobs.

- **Exceptional Rough Terrain Capability**

4 wheels drive and oscillating axle deliver superior driving while travelling on uneven jobsites.

- **More Safety and Cost Effective**

Standard features like one touch auto leveling outriggers, motion alarm, overload sensing system and flashing beacon improves safety and provides more value.

- **Easy Maintenance and Service Access**

Pull-out engine module and on-board diagnostic system make it easier to access and troubleshooting.

## PRODUCT SPECIFICATION

Model	SR1018E	SR1218E	SR0818D	SR1218D	SR1023D	SR1323D	SR1623D
Work Height Max. m	11.7	13.9	9.7	13.9	12	15	18
Platform Height-Raised m(A)	9.7	11.9	7.7	11.9	10	13	16
Platform Height-Stowed m	1.41	1.56	1.41	1.56	1.58	1.83	2.08
Platform Length×Width m	2.79×1.60	2.79×1.60	2.79×1.60	2.79×1.60	3.98×1.83	3.98×1.83	3.98×1.83
Overall Length m(B)	3.12	3.12	3.12	3.12	4.9	4.9	4.9
Overall Width m(C)	1.79	1.79	1.79	1.79	2.3	2.3	2.3
Overall Height-Guardrails Up m(D)	2.55	2.7	2.55	2.7	2.74	2.96	3.18
Overall Height-Guardrails Down m	1.89	2.04	1.89	2.04	2.06	2.28	2.5
Extension Deck m	1.52	1.52	1.52	1.52	1.45/1.14 (Front/Rear)	1.45/1.14 (Front/Rear)	1.45/1.14 (Front/Rear)
Wheelbase m	2.29	2.29	2.29	2.29	2.85	2.85	2.85
Ground Clearance-Center m	0.23	0.23	0.24	0.23	0.23	0.23	0.23
Max. Platform Occupancy Outdoor	2	2	4	2	7	7	4
Max. Platform Occupancy Indoor	4	3	4	3	7	7	4
Platform Capacity kg	454	365	680	365	1100	910	680
Platform Capacity-Extension Deck kg	140	140	140	140	230	230	230
Drive Height m	Full Height				8.5	8.5	8.5
Gradeability-Lowered %	35	35	40	35	40	40	40
Turning Radius-Outside m	4.4	4.4	4.4	4.4	5.33	5.33	5.33
Raise/Lower Speed s	39±4/46±4	61±4/55±4	34/31	61±4/55±4	45/45	55/55	55/55
Brakes	Rear-wheel Brake		Four-wheel Brake				
Drive Mode	4×2	4×2	4×4	4×4	4×4	4×4	4×4
Tire Type	Foam-filled Non-marking		Foam-filled		Solid		
Tire Size mm	Φ663×283	Φ663×283	Φ663×283	Φ663×283	Φ835×290	Φ835×290	Φ835×290
Power Source	48V DC Battery 315Ah		Kubota D1105		Kubota V2403/Deutz D2011		
Fuel Tank Capacity L	/	/	53	53	110	110	110
Hydraulic Oil Volume L	70	70	50	50	140	140	140
Machine Weight(CE) kg	3950	5100	3750	4900	6870	7235	8000

